
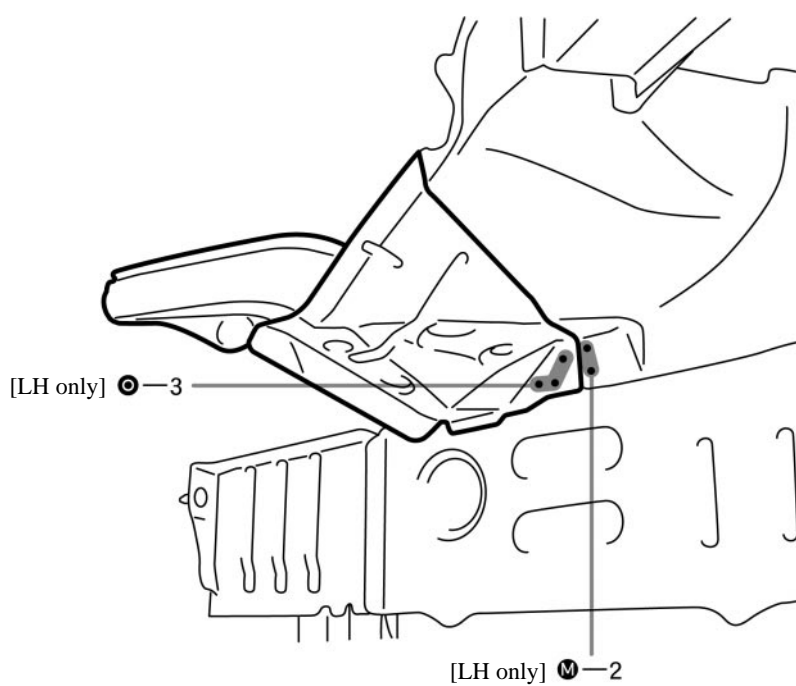



FRONT FENDER FRONT APRON (ASSY)**REPLACEMENT****1. REMOVE FRONT FENDER FRONT APRON**

- (a) Replace the front fender mounting bracket at the same time.

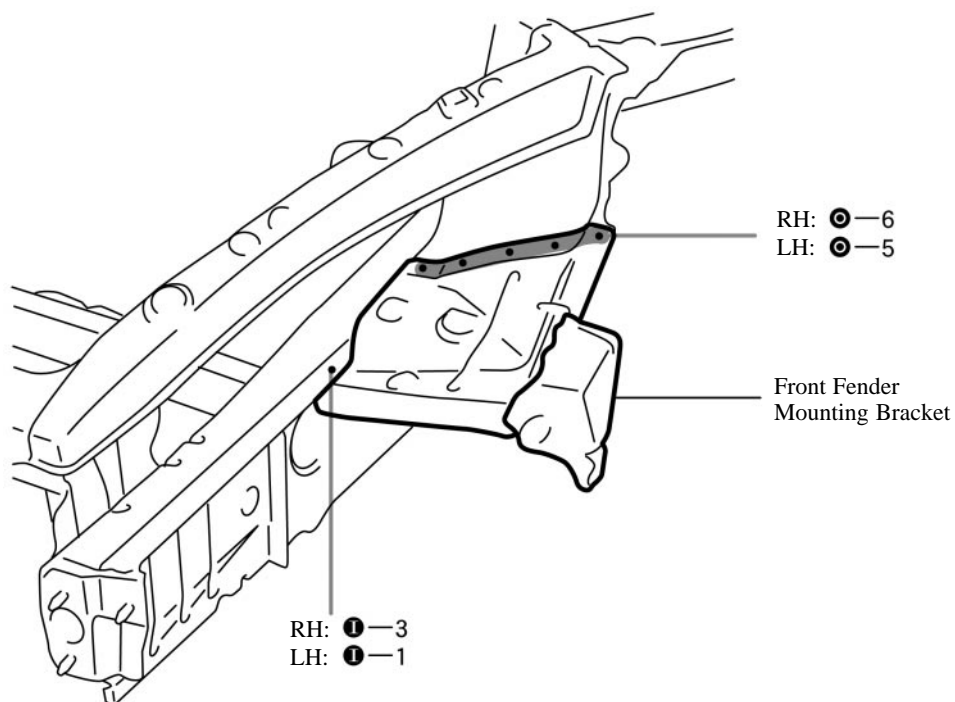

2. INSTALL FRONT FENDER FRONT APRON

- (a) Temporarily install the new parts and measure each part in accordance with the body dimension diagram.

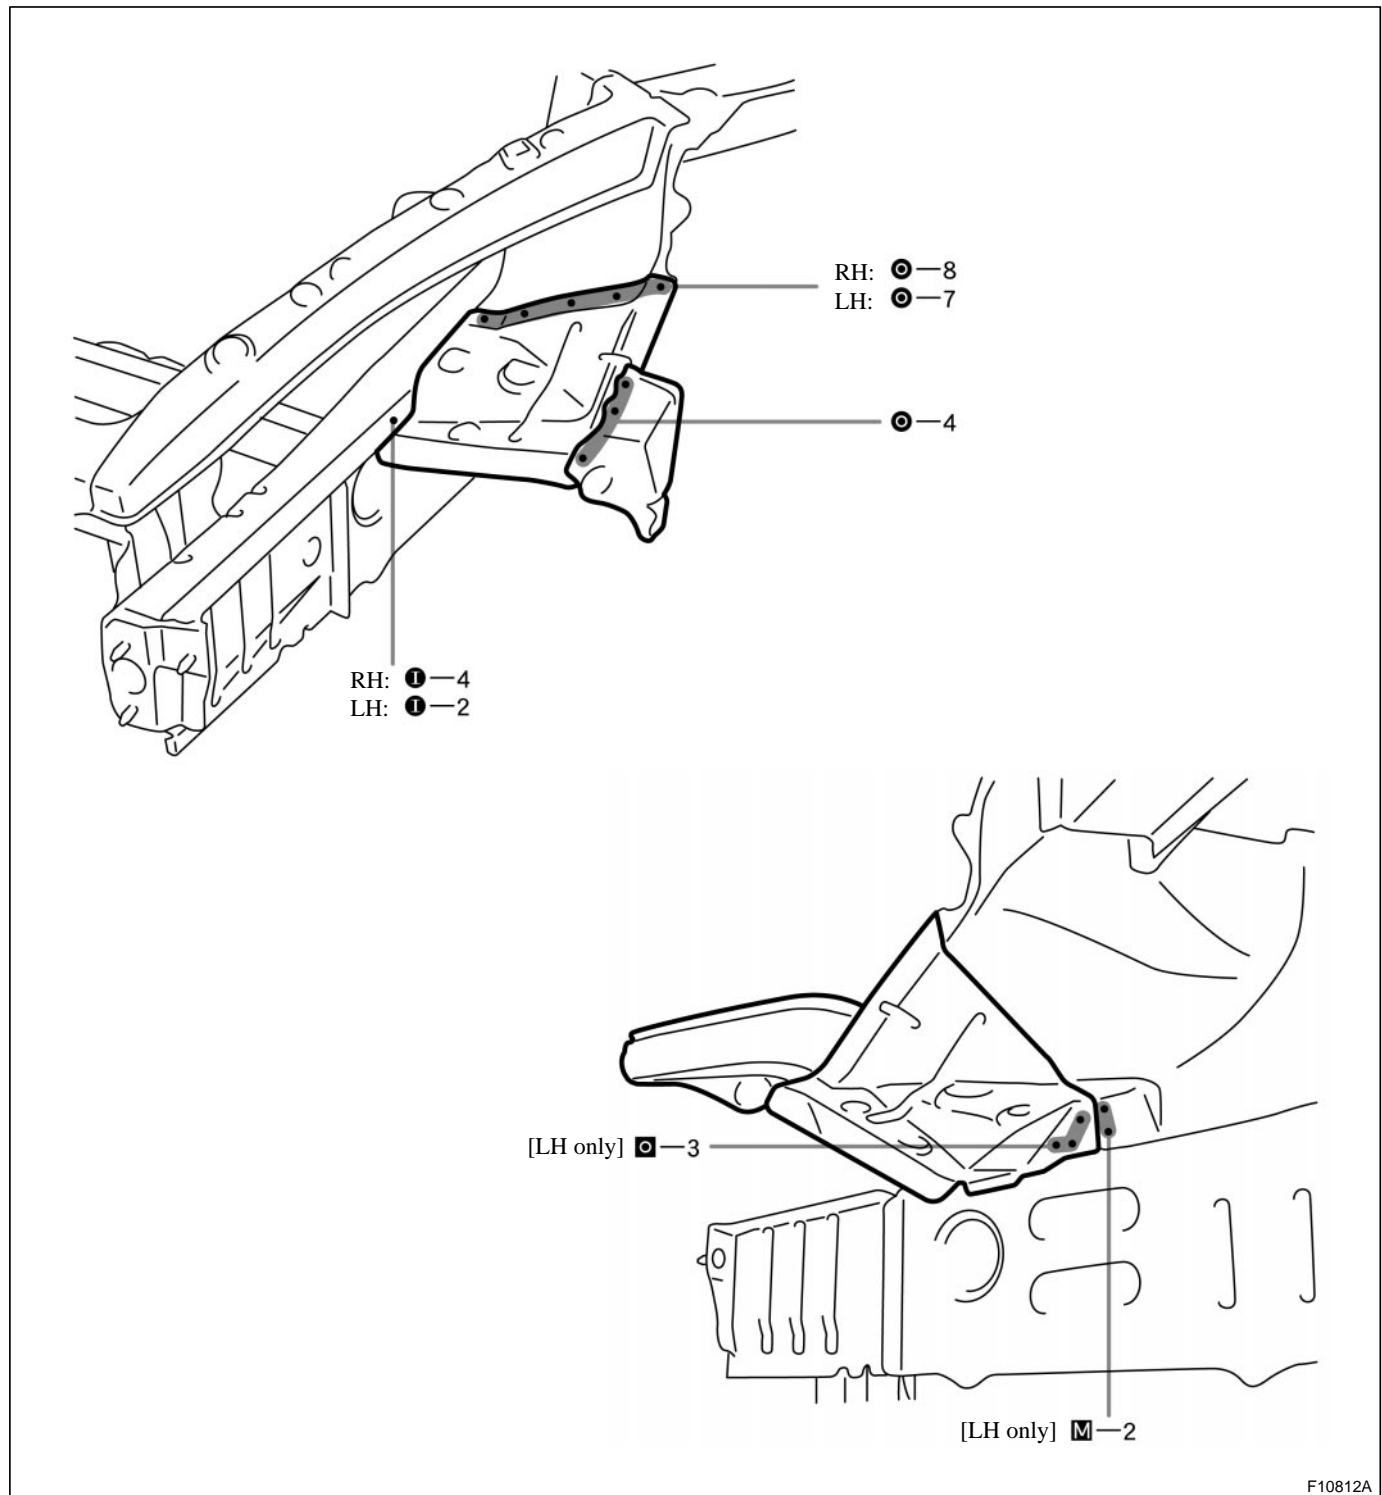**3. MEASURING THE FRONT LUGGAGE COMPARTMENT DIMENSIONS (See page BP-95)****4. APPLYING SEALER TO THE FRONT LUGGAGE COMPARTMENT (See page PC-1)****5. APPLYING UNDER COATING (See page PC-6)****6. APPLYING ANTI-RUST AGENT**

- (a) After applying the top coat layer, apply the anti-rust agent to the inside of the necked section structural weld spots.