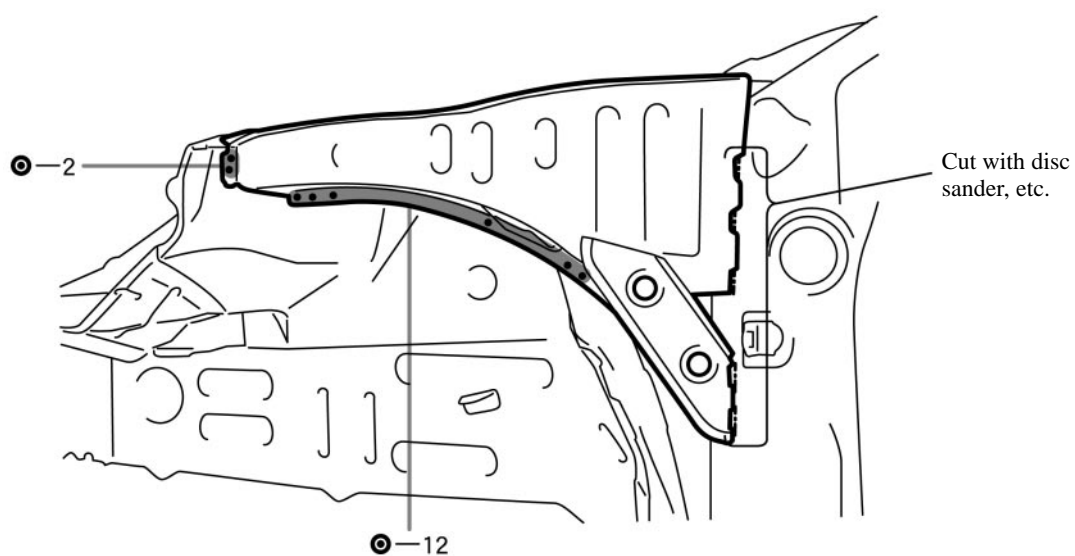
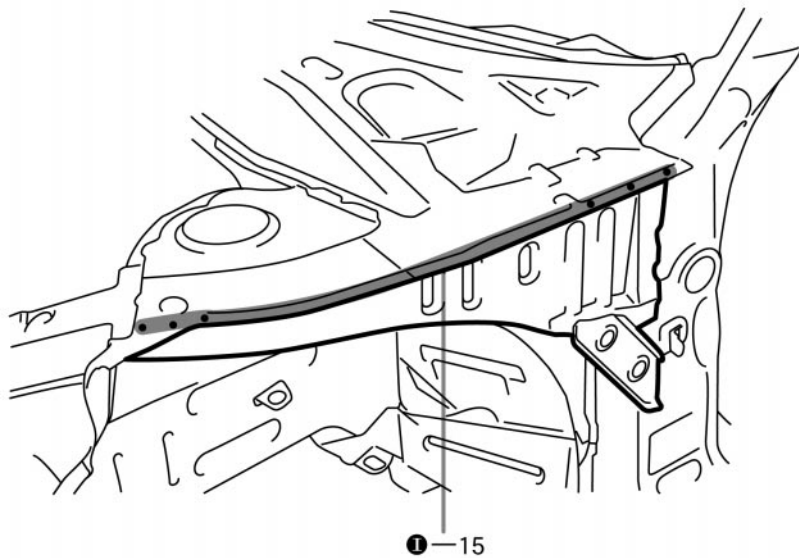
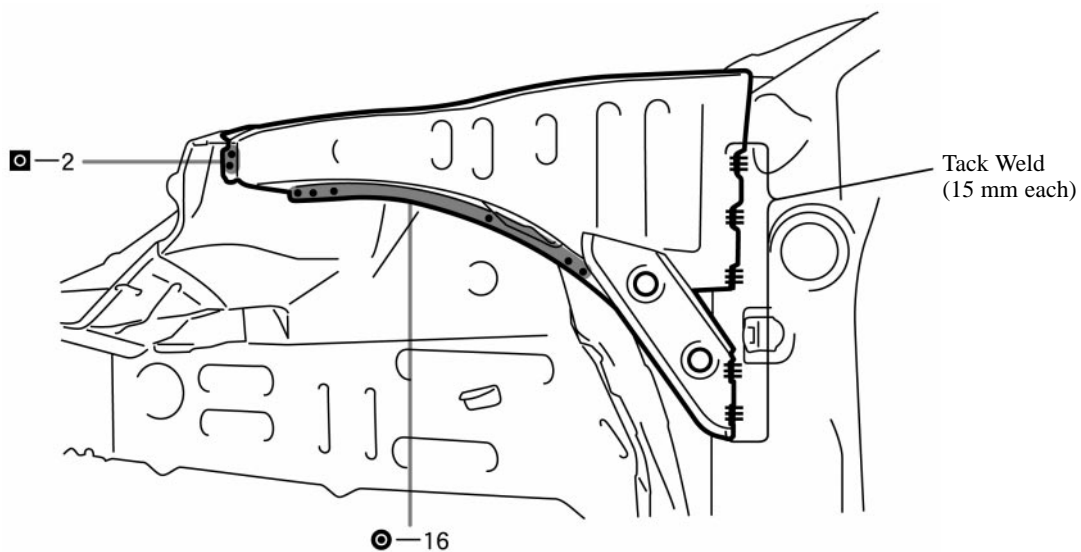
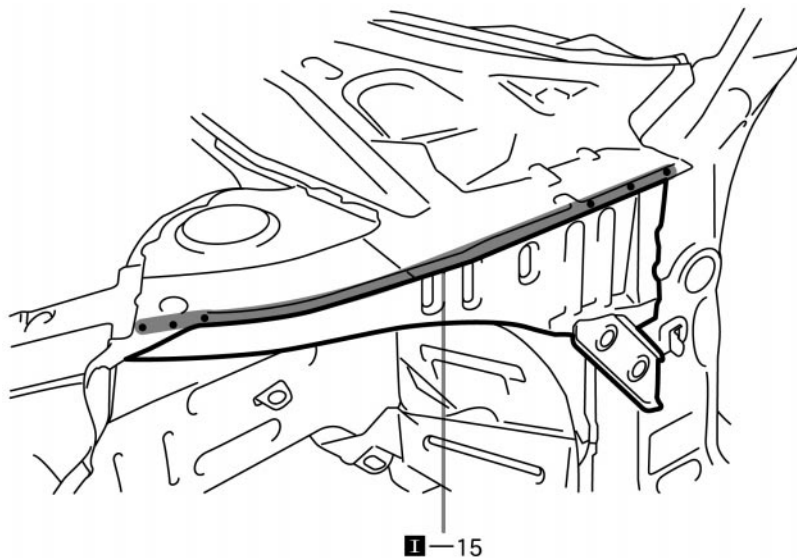


FRONT FENDER APRON LOWER GUSSET (ASSY)**REPLACEMENT****1. REMOVE FRONT FENDER APRON LOWER GUSSET**

2. INSTALL FRONT FENDER APRON LOWER GUSSET

mm	in.
15	0.59

F10827A

3. APPLYING ANTI-RUST AGENT

- (a) After applying the top coat layer, apply the anti-rust agent to the inside of the necked section structural weld spots.