
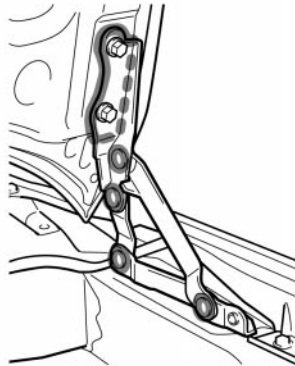



## BODY PANEL ANTI-RUST AGENT (WAX) APPLICATION AREAS

### HINT:


1. Whenever adjusting the doors and hoods, apply anti-rust agent (wax) around the hinges.
2. Even if partially repairing a part, apply anti-rust agent (wax) over the entire application area of the part.
3. Wipe off the anti-rust agent immediately with a rag soaked in a grease, wax and silicone remover, if accidentally applied to other areas.





Engine Hood Hinge



Fuel Filler  
Opening Lid Hinge

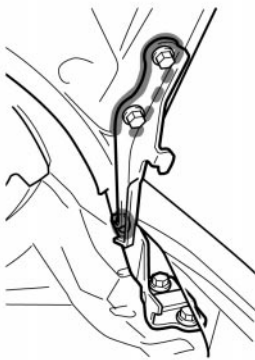

Hood Hinge

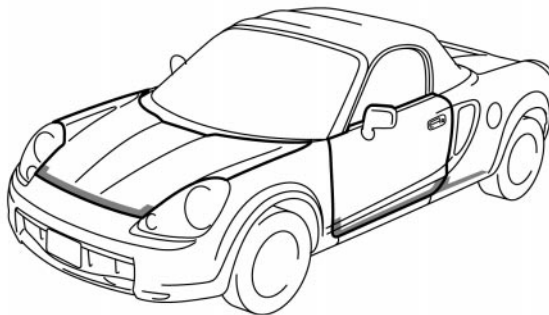

Door Hinge

