
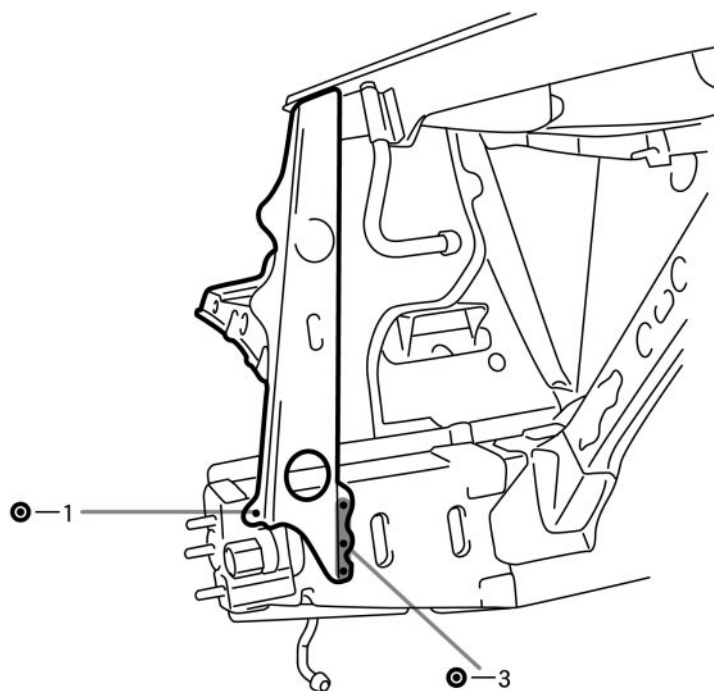


LOWER BACK SIDE PANEL (ASSY)

REPLACEMENT

1. REMOVE LOWER BACK SIDE PANEL

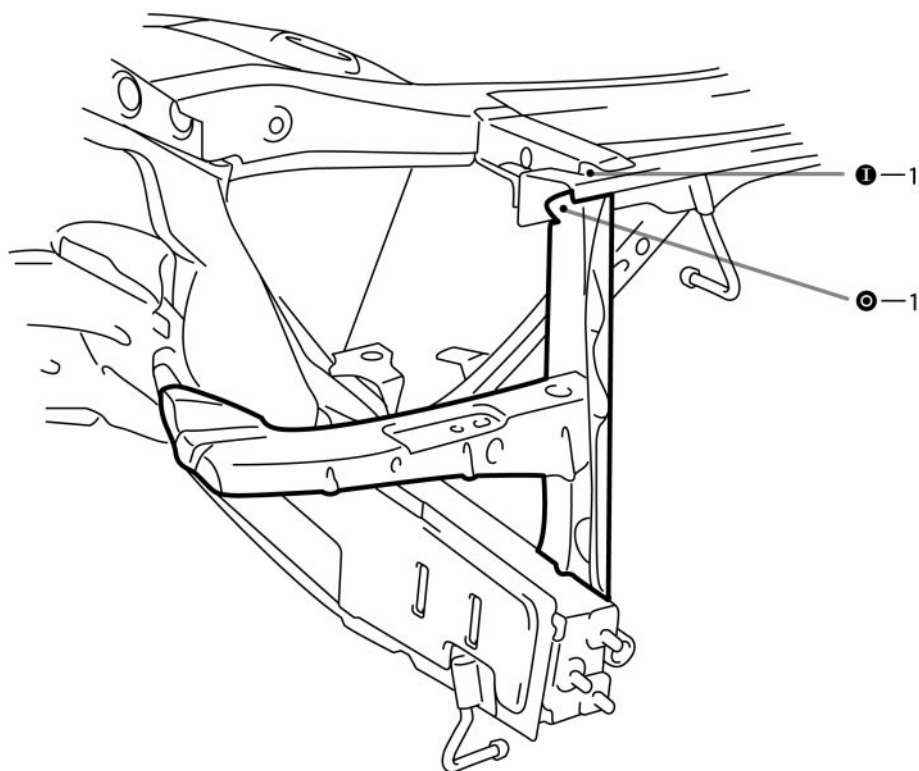


2. INSTALL LOWER BACK SIDE PANEL

- (a) Temporarily install the new parts and measure each part in accordance with the body dimension diagram.

HINT:

Inspect the fitting of the quarter panel and rear combination light, etc., before welding, since this affects the appearance of the finish.

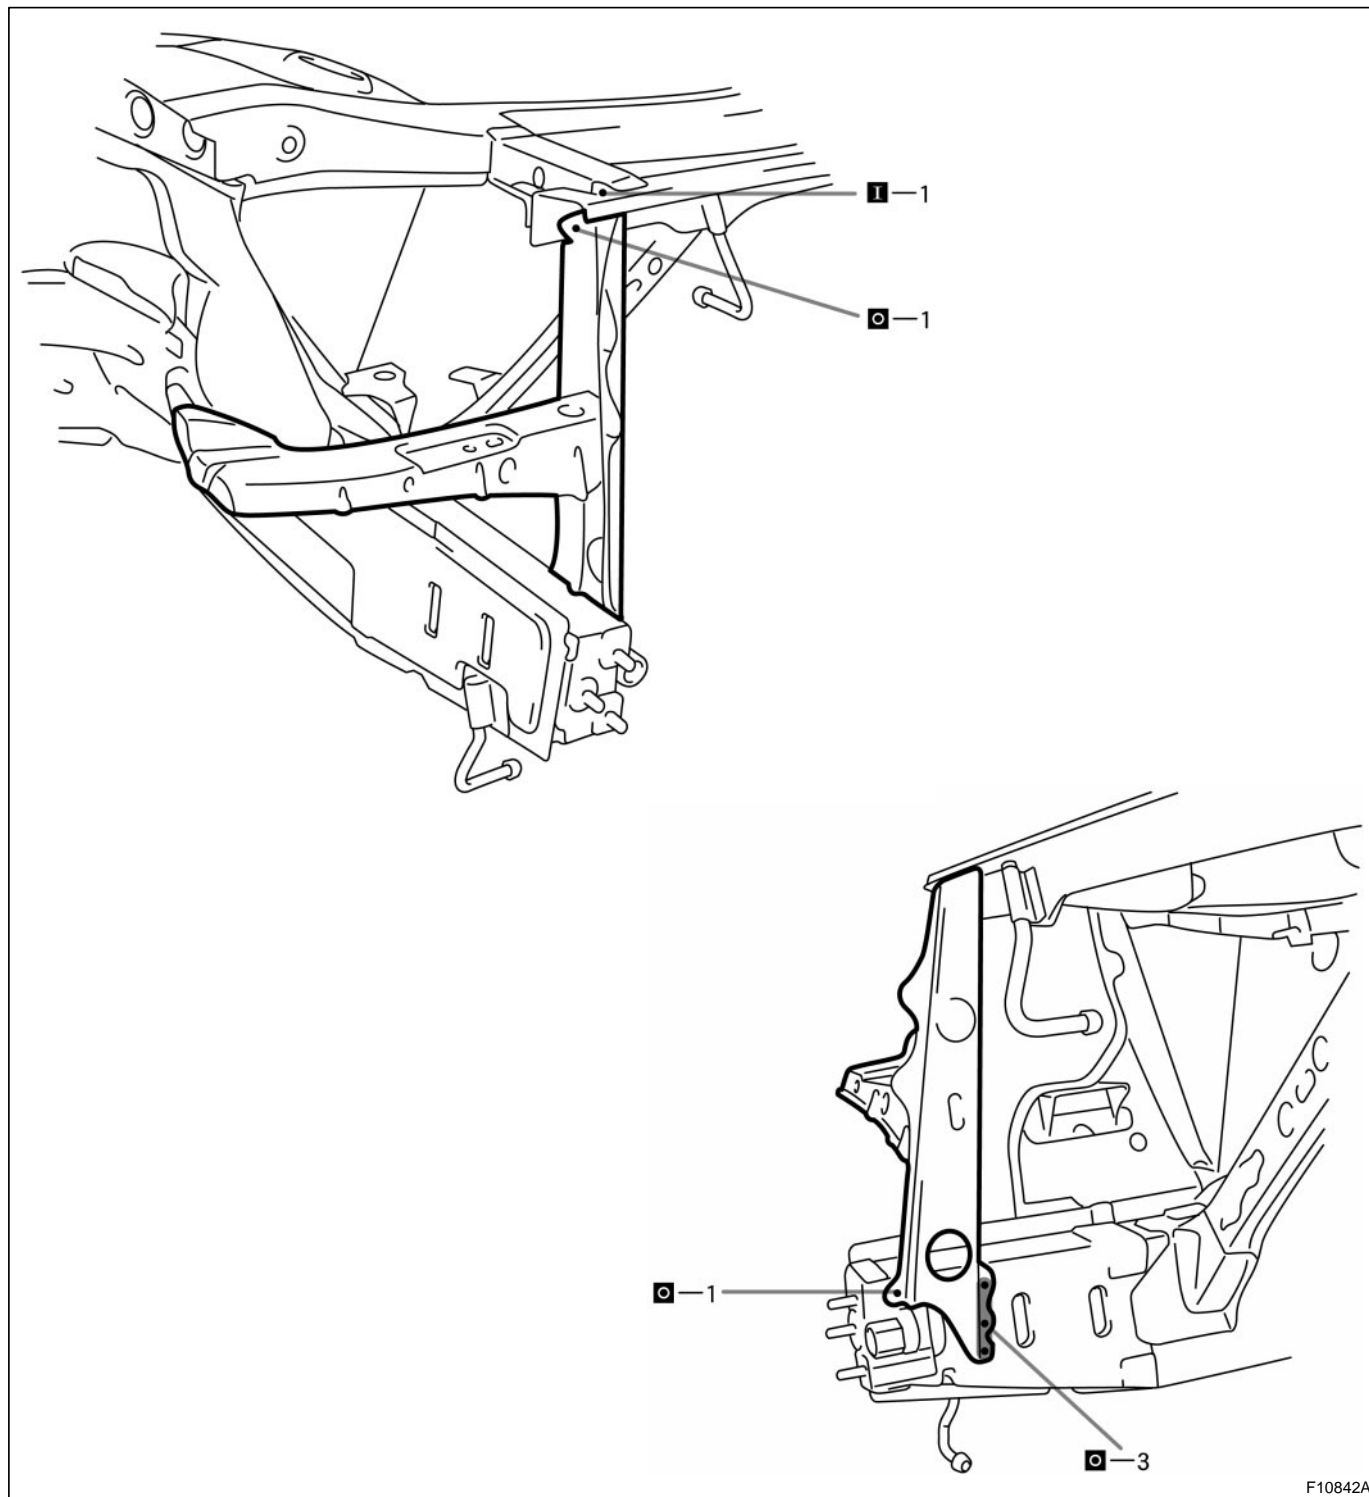**3. APPLYING ANTI-RUST AGENT**

- (a) After applying the top coat layer, apply the anti-rust agent to the inside of the necked section structural weld spots.