
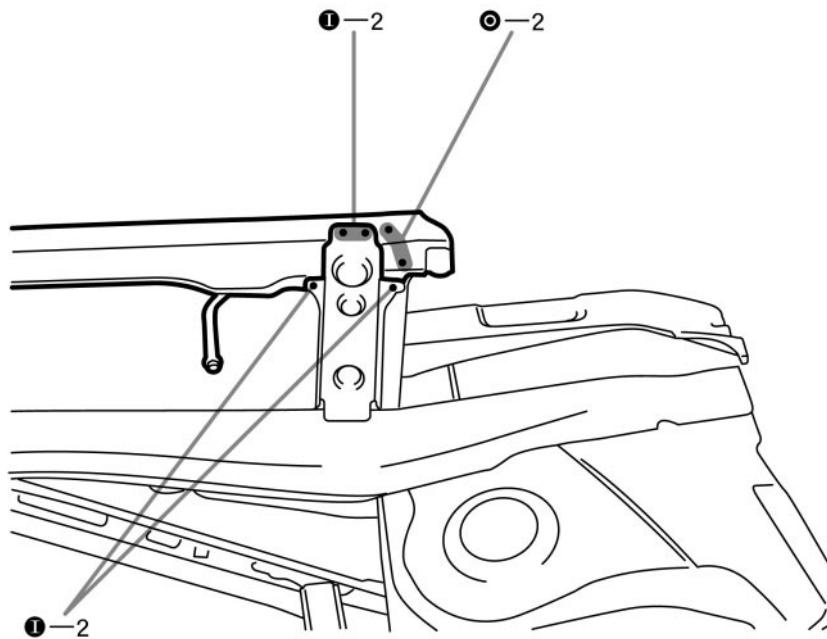




BODY LOWER BACK UPPER PANEL (ASSY)**REPLACEMENT**

1. REMOVE BODY LOWER BACK UPPER PANEL

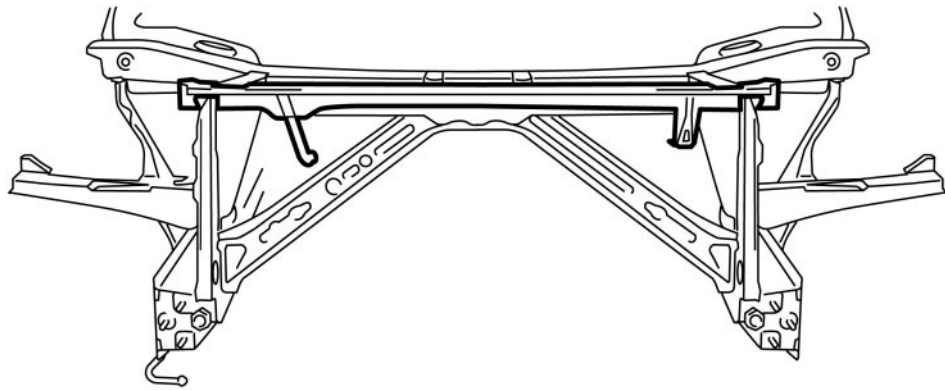

2. INSTALL BODY LOWER BACK UPPER PANEL**HINT:**

Inspect the fitting of the engine hood and rear combination light, etc., before welding, since this affects the appearance of the finish.

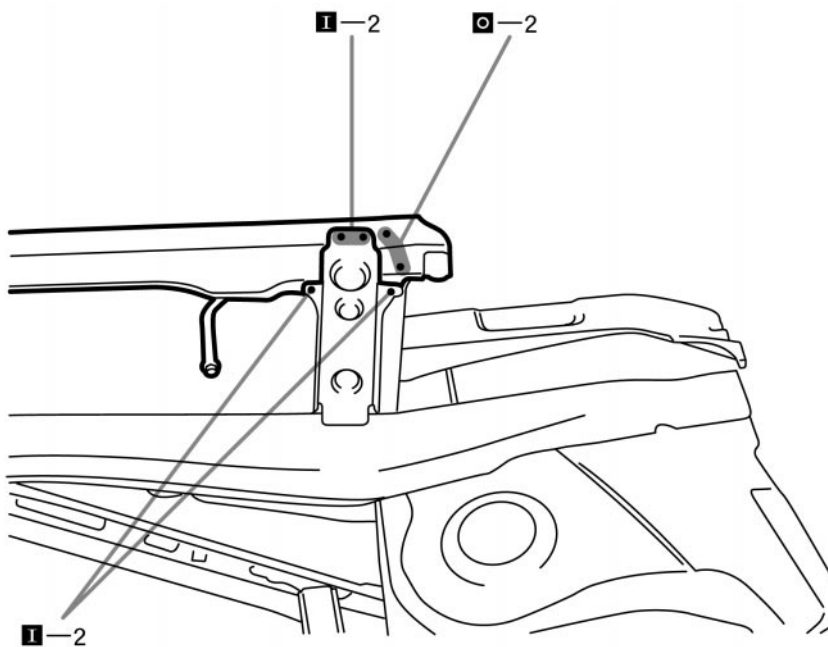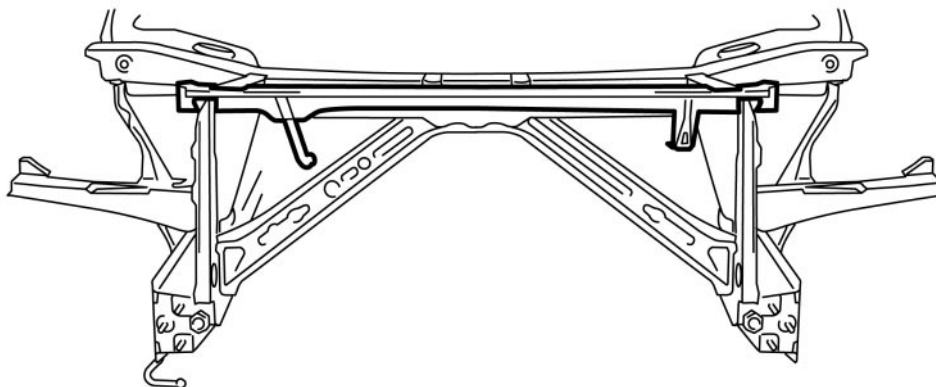

F10844A

3. APPLYING SEALER TO THE ENGINE COMPARTMENT (See page PC-1)**4. APPLYING ANTI-RUST AGENT**

- (a) After applying the top coat layer, apply the anti-rust agent to the inside of the necked section structural weld spots.