
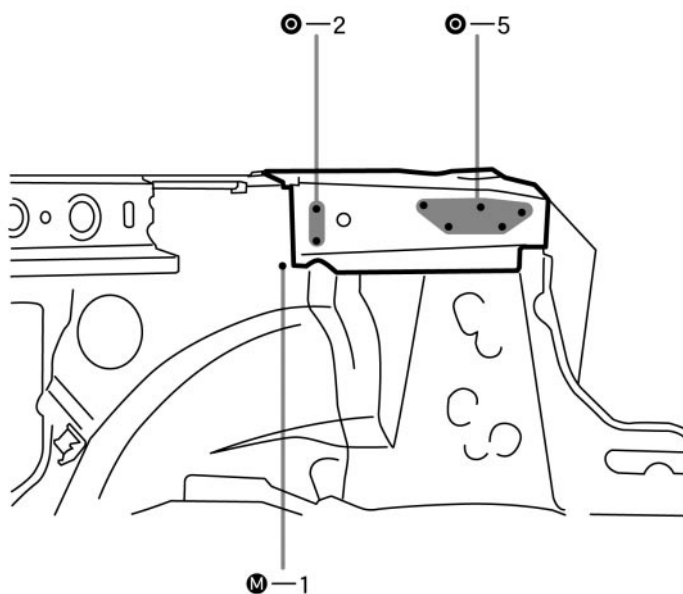
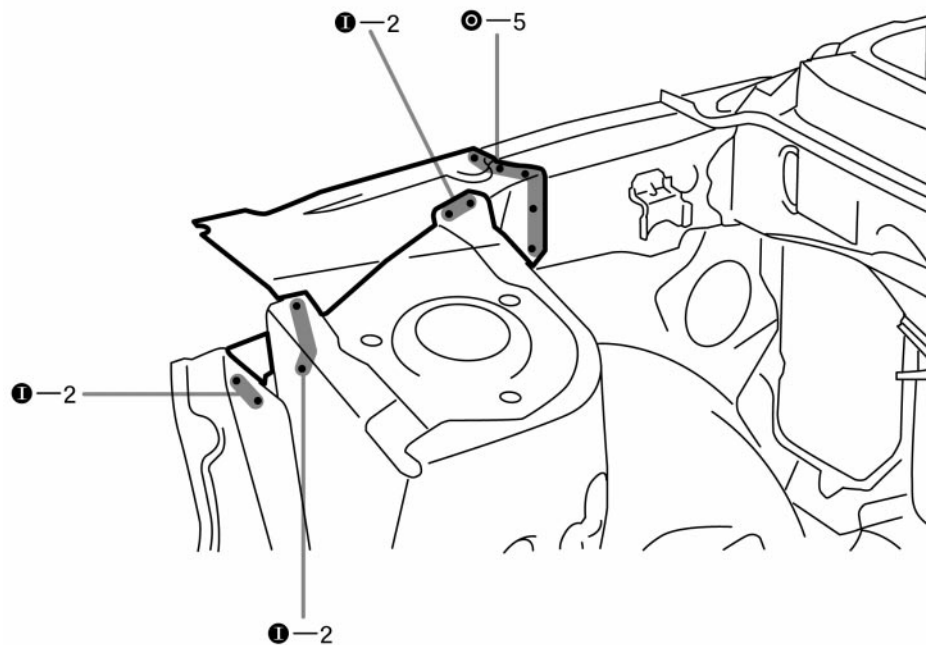
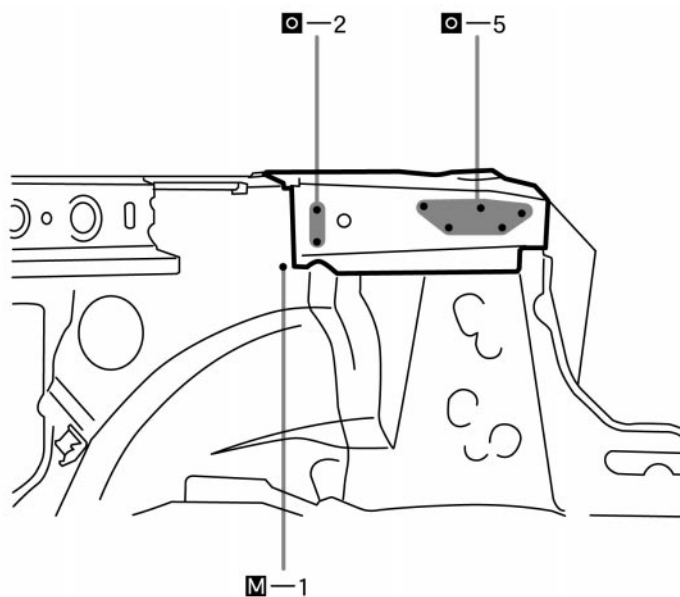


# REAR FENDER APRON REINFORCEMENT (ASSY)

## REPLACEMENT

1. REMOVE FRAME REAR UPPER CROSSMEMBER (See page BP-62)
2. REMOVE SIDE PANEL NO.4 REINFORCEMENT (See page BP-51)
3. REMOVE REAR FENDER APRON REINFORCEMENT

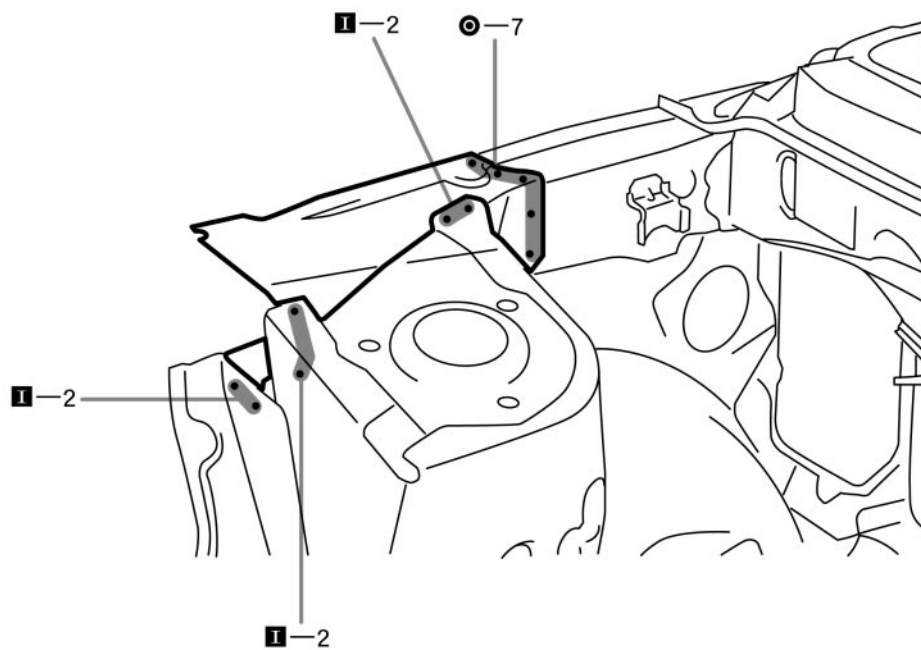

**4. INSTALL REAR FENDER APRON REINFORCEMENT**

- 
5. **INSTALL SIDE PANEL NO.4 REINFORCEMENT (See page BP-52)**
  6. **MEASURING THE ENGINE COMPARTMENT DIMENSIONS (See page BP-95)**
  7. **INSTALL FRAME REAR UPPER CROSSMEMBER (See page BP-63)**
  8. **APPLYING SEALER TO THE ENGINE COMPARTMENT (See page PC-1)**
  9. **APPLYING ANTI-RUST AGENT**
    - (a) After applying the top coat layer, apply the anti-rust agent to the inside of the necked section structural weld spots.